


K2-KAN STRUCTURED PIPES

PP DN/OD

Sewer corrugated pipe DN/OD

K2-Kan OD
with gasket, with socket
SN 8
Colour: ●

Standards: PN-EN 13476-3,
ITB-KOT-2017/0120 edition 1

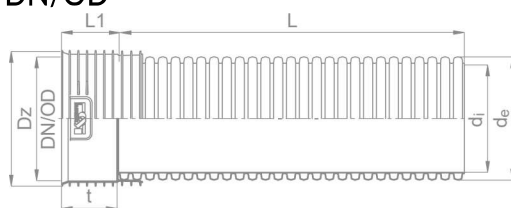


Dimension (DN/OD x L) [mm]	Index	d _i	d _e	D _z	L ₁	t
160 x 3000	0912343300	137	160	182	90	82
160 x 6000	0912343600	137	160	182	90	82
200 x 3000	0912543300	175	200	225	104	97
200 x 6000	0912543600	175	200	225	104	97
250 x 3000	0912743300	219	250	281	120	113
250 x 6000	0912743600	219	250	281	120	113
315 x 3000	0912943300	276	315	350	142	135
315 x 6000	0912943600	276	315	350	142	135
400 x 3000	0913143300	346	400	439	214	208
400 x 6000	0913143600	346	400	439	214	208

Sewer corrugated pipe PP DN/OD

K2-Kan OD
with gasket, with socket
SN 10*
Colour: ●

Standards: PN-EN 13476-3

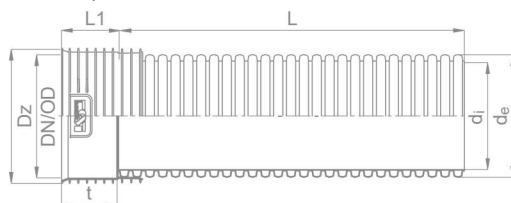

Dimension (DN/OD x L) [mm]	Index	d _i	d _e	D _z	L ₁	t
160 x 3000	0912353300	137	160	182	90	82
160 x 6000	0912353600	137	160	182	90	82
200 x 3000	0912553300	175	200	225	104	97
200 x 6000	0912553600	175	200	225	104	97
250 x 3000	0912753300	219	250	281	120	113
250 x 6000	0912753600	219	250	281	120	113
315 x 3000	0912953300	276	315	350	142	135
315 x 6000	0912953600	276	315	350	142	135
400 x 3000	0913153300	346	400	439	214	208
400 x 6000	0913153600	346	400	439	214	208

* SN 10 pipes made to order after consultations with manufacturer


K2-KAN FITTINGS

PP DN/OD

PP coupling

K2-Kan OD
without seal
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1




Dimension (DN/OD) [mm]	Index	D _z	L	t
160	1000423300	182	167	82
200	1004253000	225	198	97
250	1004273000	281	231	113
315	1004293000	350	275	135
400	1004303000	439	409	202

PP sleeve

K2-Kan OD
without seal
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1




Dimension (DN/OD) [mm]	Index	D _z	L
160	1002233000	182	167
200	1002253000	225	198
250	1002273000	281	231
315	1002293000	350	275
400	1002303000	439	409

K2-KAN FITTINGS

PP DN/OD

PP bend

K2-Kan OD
without seal
double socket
Colour: ●



Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

Dimension (DN/OD α) [mm]	Index	l	t
160 / 15°	1013233150	106	82
160 / 30°	1013233300	116	82
160 / 45°	1013233450	126	82
160 / 90°	1013233900	148	82
200 / 15°	1013253150	138	101
200 / 30°	1013253300	149	101
200 / 45°	1013253450	163	101
200 / 90°	1013253900	233	101
250 / 15°	1013273150	161	117
250 / 30°	1013273300	175	117
250 / 45°	1013273450	192	117
250 / 90°	1013273900	282	117
315 / 15°	1013293150	187	139
315 / 30°	1013293300	205	139
315 / 45°	1013293450	222	139
315 / 90°	1013293900	329	139
400 / 15°	1013313150	267	208
400 / 30°	1013313300	290	208
400 / 45°	1013313450	311	208
400 / 90°	1013313900	447	208


K2-KAN FITTINGS

PP DN/OD

PP branch 45°

K2-Kan OD
without seal
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1



Dimension (DN/OD DN ₁) [mm]	Index	L	t	L ₁	t ₁
160 / 160	1023153450	449	82	298	82
200 / 160	1023183450	478	101	360	82
200 / 200	1023193450	549	101	387	101
250 / 160	1023223450	669	117	528	82
250 / 200	1023233450	669	117	426	101
250 / 250	1023243450	857	117	614	117
315 / 160	1023273450	726	139	555	82
315 / 200	1023283450	726	139	453	101
315 / 250	1023293450	899	139	650	117
315 / 315	1023303450	973	139	708	139
400 / 160	1023333450	818	208	598	82
400 / 200	1023343450	896	208	644	101
400 / 250	1023353450	1013	208	727	117
400 / 315	1023363450	1087	208	784	139
400 / 400	1023373450	1244	208	918	208


K2-KAN FITTINGS

PP DN/OD

PP branch 45°

K2-Kan OD
without seal
with connection for smooth pipe
Colour: ●

Standards: PN-EN 13476-3,, ITB-KOT-2017/0120 edition 1




Dimension (DN/OD DN ₁) [mm]	Index	L	t	L ₁	t ₁
160 / 110	1021133450	449	82	294	78
200 / 110	1021163450	478	101	360	77
200 / 160	1021183450	478	101	300	92
250 / 110	1021203450	669	117	342	77
250 / 160	1021223450	669	117	342	92
250 / 200	1021233450	669	117	377	121
315 / 110	1021253450	726	139	378	77
315 / 160	1021273450	726	139	413	92
315 / 200	1021283450	726	139	634	121
315 / 250	1021293450	969	139	632	140
400 / 110	1021313450	818	208	627	77
400 / 160	1021333450	876	208	697	92
400 / 200	1021343450	989	208	697	121
400 / 250	1021353450	1083	208	710	140
400 / 315	1021363450	1206	208	779	159

PP Grommet

K2-Kan OD
without seal
through concrete manhole
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1




Dimension (DN/OD) [mm]	Index	D _z	L
160	1049233100	182	110
200	1049253100	225	110
250	1049273100	281	125
315	1049293100	350	149
400	1049313100	439	220

PP cap

K2-Kan OD
without seal
universal for socket or spigot
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

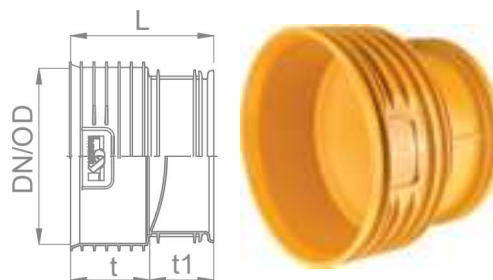


Dimension (DN/OD) [mm]	Index	L	t	t ₁
160	1040233100	161	82	78
200	1040253100	190	97	89
250	1040273100	221	113	103
315	1040293100	260	135	120
400	1040313100	392	202	174

PP eccentric reducer

K2-Kan OD
without seal
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

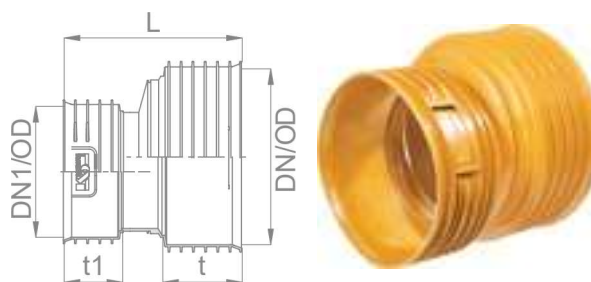

Dimension (DN/OD DN ₁) [mm]	Index	L	t	t ₁
200 / 160	1030183100	224	97	82
250 / 160	1030223100	244	113	82
250 / 200	1030233100	261	113	97
315 / 200	1030283100	383	139	97
315 / 250	1030293100	299	139	113
400 / 250	1030353100	382	208	113
400 / 315	1030363100	406	208	139


K2-KAN FITTINGS

PP DN/OD

PP coupling for PVC socket

K2-Kan OD
without seal
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

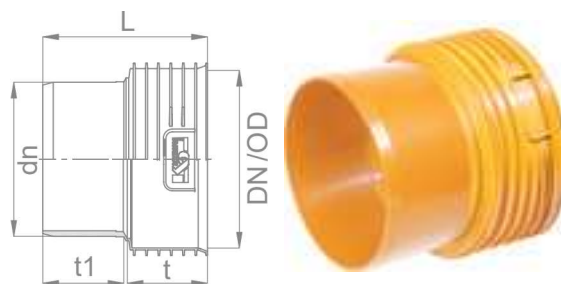


Dimension (DN/OD dn) [mm]	Index	L	t	t ₁
160 / 160	1038233100	176	82	82
200 / 200	1038253100	200	97	100
250 / 250	1038273100	254	113	137
315 / 315	1038293100	287	139	146
400 / 400	1038313100	391	208	181

PP coupling for PVC socket

K2-Kan OD
without seal
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

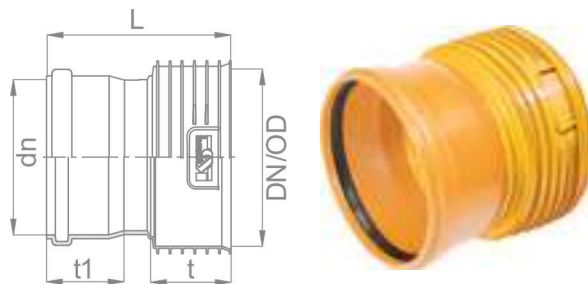


Dimension (DN/OD dn) [mm]	Index	L	t	t ₁
160 / 160	1039233100	167	82	82
200 / 200	1039253100	229	97	92
250 / 250	1039273100	280	113	121
315 / 315	1039293100	329	139	140
400 / 400	1039313100	408	208	159

Hole saw with holder

for PP saddle connection
Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

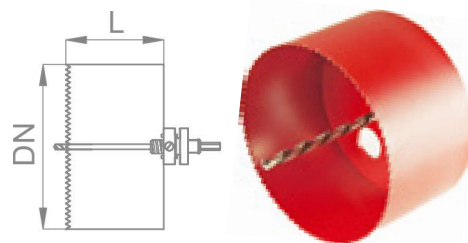


Dimension (DN/OD DN ₁) [mm]	Index	L
160 / 177	5191231100	90
200 / 214,5	5191253100	90

PP Saddle conection

K2-Kan OD to smooth pipe (KG)
mechanical connection

Colour: ●

Standards: PN-EN 13476-3, ITB-KOT-2017/0120 edition 1

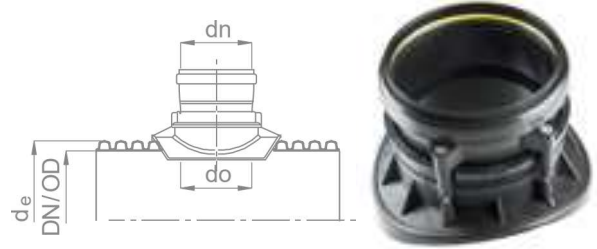

Dimension (DN/OD dn) [mm]	Index	d _e	d _o
250 - 160	1027223900	282	177
315 - 160	1027273900	340	177
315 - 200	1027283900	340	214,5
400 - 160	1027333900	455	177
400 - 200	1027343900	455	214,5

Rubber seal

Colour: ●



Standards: PN-EN 681, PN-EN 13476-3

Dimension (DN/OD) [mm]	Index	H	B
160	5131241010	11	10
200	5131251010	14	12
250	5131271010	17	14
315	5131291010	22	18
400	5131311010	31	27

Oil-resistant seal made to order after consultations with manufacturer

Kaczmarek Malewo Spółka Jawna reserves its rights to modify the products and technical parameters without notice. The company will not be responsible for misprints. The brochure is informative and is not an offer in the meaning of Commercial Law. The photographs are demonstrative and may differ slightly from actual products.