



ENDURVINNSLA Í 80 ÁR

NIDAGRAVEL NG040

JARÐVERGSGRINDUR



MÁLMSTEYPA
Þorgríms Jónssonar ehf.

MÍÐHRAUNI 6 • 210 GARÐABÆR • SÍMI 544 8900


www.malmsteypa.is

m@malmsteypa.is





SPECIFICATIONS


Properties		
Material	LDPE - 100% recycled	
Mass per unit area (kg/m ²)	5.20	ISO 845
Length (mm)	500	ISO 1923
Width (mm)	500	
Thickness (mm)	40	
	3 to 5.5	
Cell size (mm)	Variable ± 65	
Colour	Black	
Anchoring points	Four per side / 8 per linear metre	
Resistance to chemical agents	Excellent resistance to water and most acids, bases and salt solutions	
UV-resistant	Anti-UV treatment	
Compression resistance*	up to 800 t/m ²	ISO 844
Applications**	Areas for pedestrians, cyclists and light motorcyclists	ISO 124
	Light vehicle driveways	
	Light vehicle parking areas	
	Occasional firefighter vehicle access	ISO 1072
	Maximum load: 20 tonnes per axle	
	Light vehicle driveways, up to 10% slope	

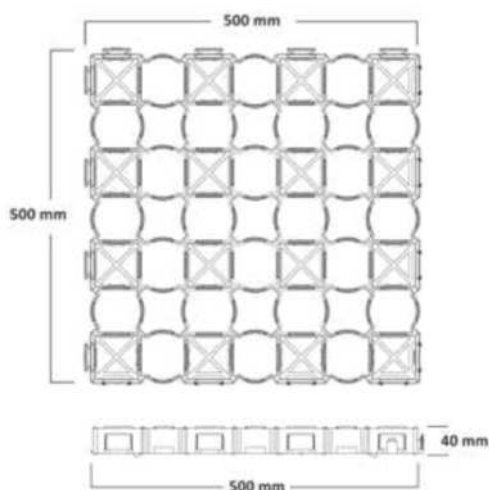

VN: 361000001

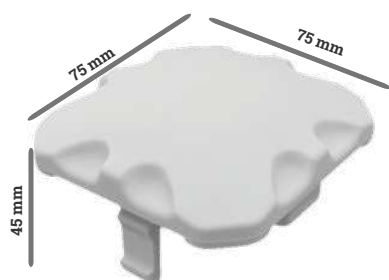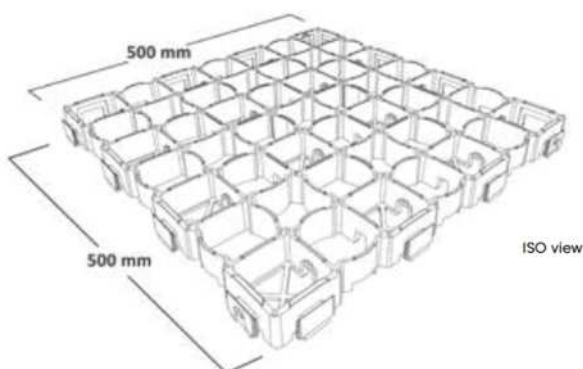

VN: 3610000020

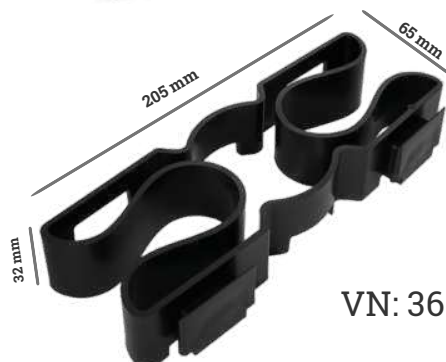

VN: 3610000010